



Tempest™ Deck Post

(sku 94800812)

Overview

This post is for use with the following permanent-mount Tempest models

- **Tempest Torch 24v**
LP - 94900755
NG - 94900745
Convertible - 94900782
- **Tempest Torch Manual Start**
LP - 94900753
NG - 94900743
Convertible - 94900780
- **Tempest Lantern 20k - 24v**
LP - 94900757
NG - 94900747
Convertible - 94900784
- **Tempest Lantern 20k - Manual Start**
LP - 94900756
NG - 94900746)
- **Tempest Lantern 50k - 24v**
LP/NG - 94900748

This post must be used with the Tempest Deck Mount (sku# **94800821**). We recommend the post be installed by a qualified installer.


Packing List

- Torch Post (69")
- Stainless Flex Line (75")
- Tube Fitting (1/2" to 3/8" Flare – to connect flex line to torch)

Post Attachment

NOTE: The illustration to the right is for example only. Make sure to follow all gas line and building code requirements for your location. Leak test all connections before use.

Tempest Torch/Lantern 20k (Tempest Lantern 50k see next page)

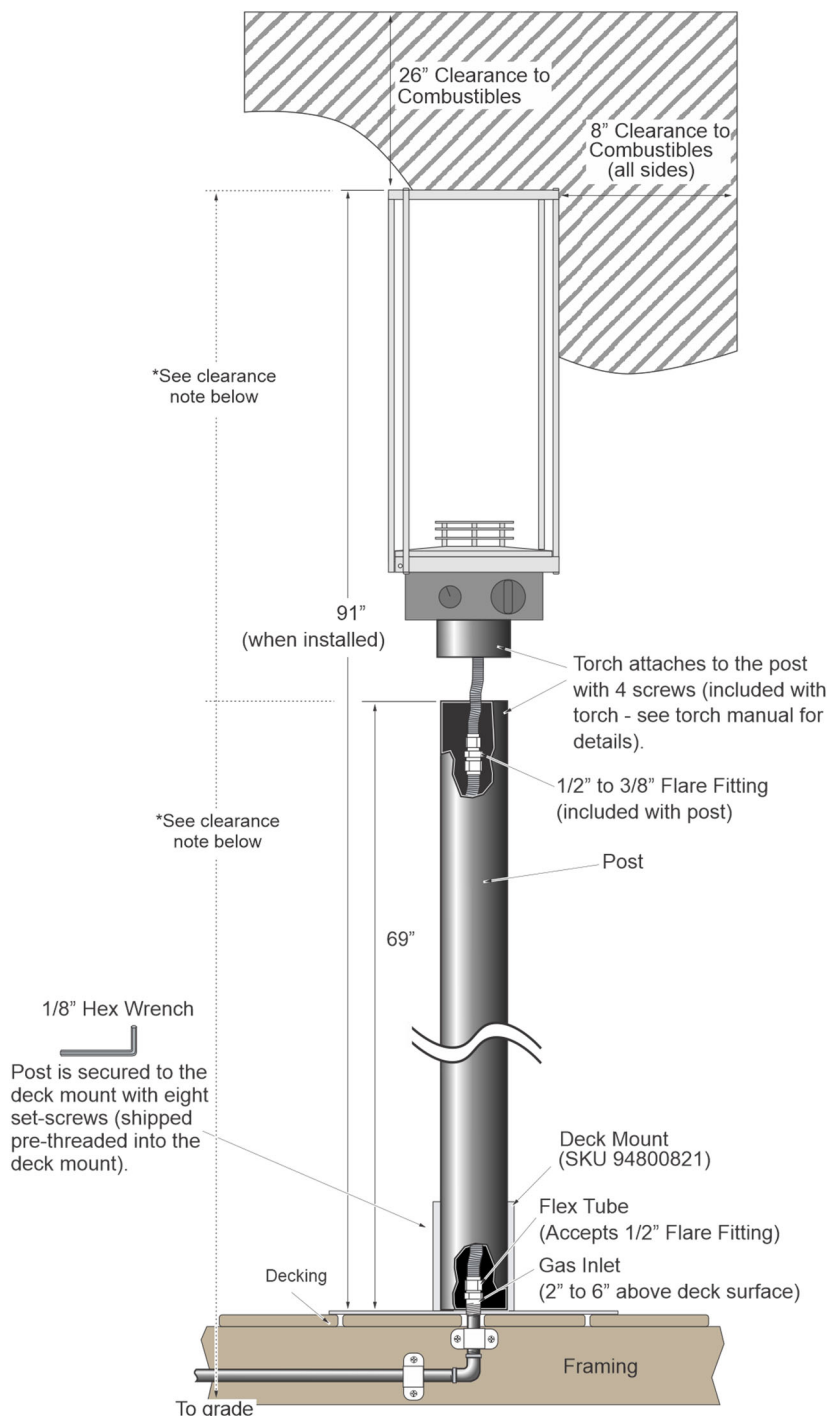

***NOTE:** The distance from ground level to the top of the Torch shall be a minimum of 7' (2.1m) where installed within 2' (0.6m) of public walkways (e.g.: sidewalk, shared walkway between two homes, or pathway in commercial applications). Lesser clearances shall be permitted to be used only where acceptable to the authority having jurisdiction.

63" - Minimum height above grade the top of the post must be above grade to meet this requirement.



Tempest™ Deck Post

(sku 94800812)

Tempest Lantern - 50k


This post must be used with the Tempest Deck Mount (sku# **94800821**). We recommend the post be installed by a qualified installer.

Packing List

- Torch Post (69")
- Stainless Flex Line (75")
- Tube Fitting (1/2" to 3/8" Flare – to connect flex line to torch)

Post Attachment

NOTE: The illustration to the right is for example only. Make sure to follow all gas line and building code requirements for your location. Leak test all connections before use.

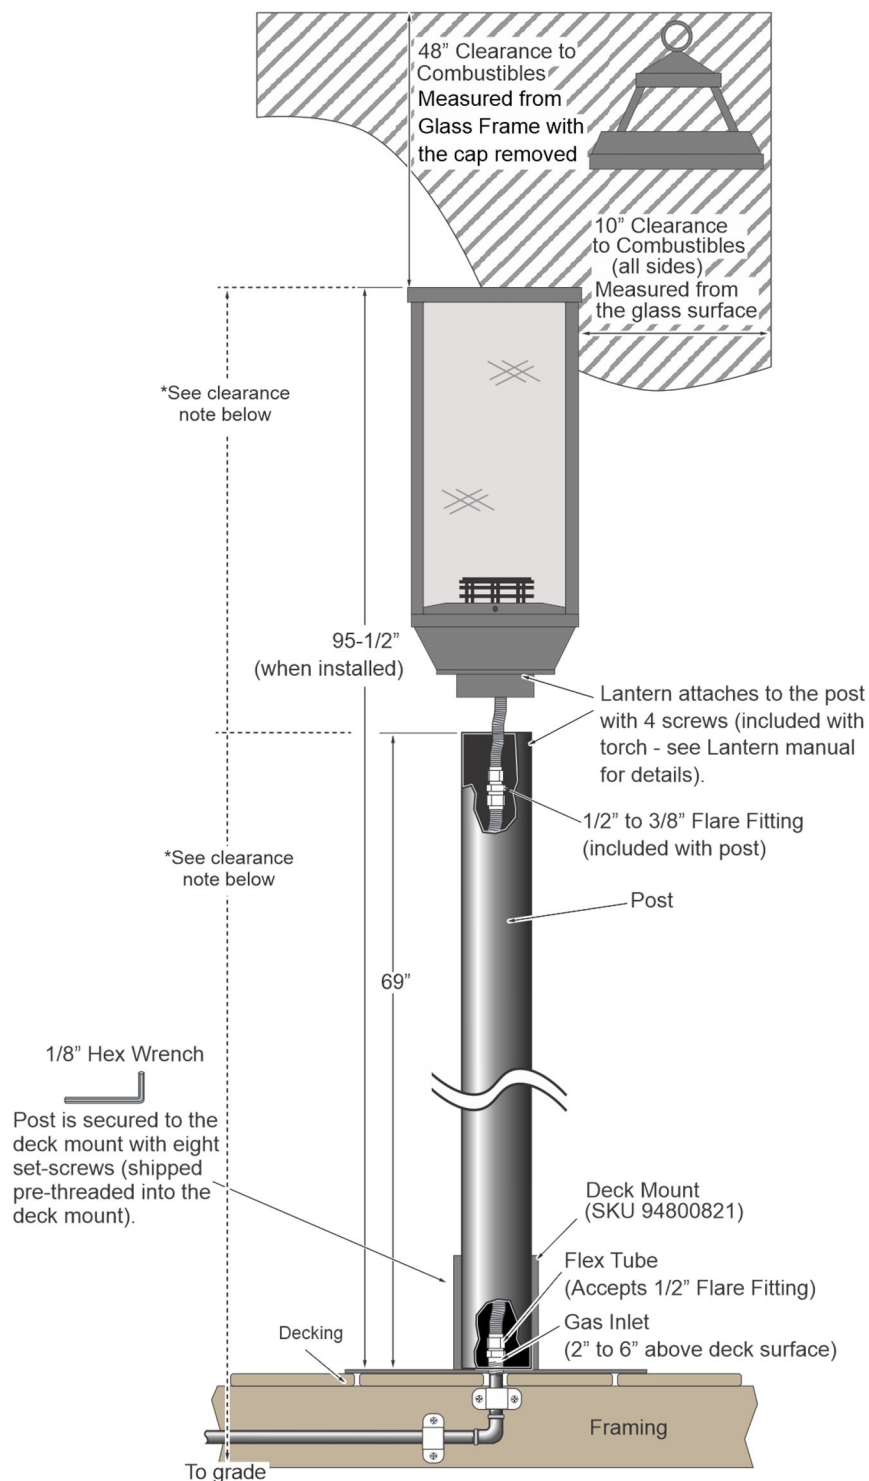

***NOTE:** The distance from ground level to the top of the Lantern shall be a minimum of 7' (2.1m) where installed within 2' (0.6M) of public walkways (e.g.: sidewalk, shared walkway between two homes, or pathway in commercial applications). Lesser clearances shall be permitted to be used only where acceptable to the authority having jurisdiction.

58-1/2" - Minimum height above grade the top of the post must be above grade to meet this requirement.